



Acumis Gamma S
LPL680

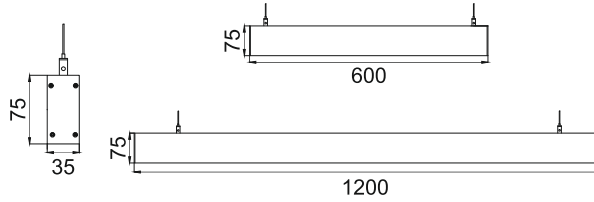






- Housing Finish: HA Al. Anodised, HW White, HB Black, HC Custom
- Length: L60 600MM, L12 1200MM, LC Custom
- IP Rating: 20 IP20

Unit : MM


Linear LED Light

Illumination Options

- | | | | | | | | | | | | |
|--------|--|----------|-----------|--|-------------|--|--------------|-----|-------|--|----------|
| 27 DfP | | 12W @600 | 24W @1200 | | 1080lm @600 | | 2160lm @1200 | CCT | 2700K | | Diffused |
| 30 DfP | | 12W @600 | 24W @1200 | | 1140lm @600 | | 2280lm @1200 | K | 3000K | | Diffused |
| 40 DfP | | 12W @600 | 24W @1200 | | 1260lm @600 | | 2520lm @1200 | CCT | 4000K | | Diffused |
| 65 DfP | | 12W @600 | 24W @1200 | | 1440lm @600 | | 2880lm @1200 | K | 6500k | | Diffused |



I 'I' Joint



L 'L' Joint


* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details

| | | | |
|----------------------|-------------------------|-------------------|--------------------|
| Housing material | Aluminum Extruded | Light Source | LED |
| Diffuser material | PMMA | CRI (Ra) | >90 |
| Mounting | Surface/Pendant mounted | MacAdam Ellipse | <3 |
| Weight | 590/1170gms | Luminous Efficacy | ~75lm/W@3000k |
| Junction Temperature | Tj<75°C | Life Time | L80-B10 50,000hrs. |


Accessories

- N** Non Dimmable
P Phase Cut Dimming
A 0-10/ 1-10V Analog
D DALI Dimming



Other Products in this Series

| | | | | | | | |
|---------------------------------------|---------------------------------------|---------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|
| | | | | | | | |
| Acumis Alpha S LPL644 W35xH55 12W-24W | Acumis Alpha M LPL645 W50xH55 18W-36W | Acumis Alpha L LPL646 W75xH55 24W-48W | Acumis Beta S LPL662 W50xH55 12W-24W | Acumis Beta M LPL663 W65xH55 18W-36W | Acumis Beta L LPL664 W95xH55 24W-48W | Acumis Gamma M LPL681 W50xH75 18W-36W | Acumis Gamma L LPL682 W75xH75 24W-48W |



Ordering code : LPLxxx(model no)-Hx(housing)-Lxx(length)-xx(IP)-xxxx(watt per meter+cct)-Lx(linkage)-x(dimming)-Mx(mounting)
Example : {680} {HA} {L60} {20} {2427} {LT} {A} {MS}