





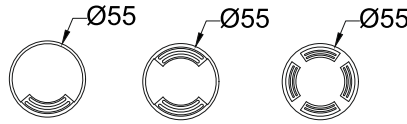

**Hypogean RC-3
ERI605**





Finish	<input type="checkbox"/> FS	SS
	<input type="checkbox"/> FC	Custom
Cable Length	<input type="checkbox"/> C0.5	0.5 Meter
	<input type="checkbox"/> C1	1 Meter
	<input type="checkbox"/> CC	Custom
Opening	<input type="checkbox"/> 1W	1 Window
	<input type="checkbox"/> 2W	2 Window
	<input type="checkbox"/> 4W	4 Window
Voltage	<input type="checkbox"/> 24V	DC24V
	<input type="checkbox"/> 230V	AC230V
IP Rating	<input type="checkbox"/> 67	IP67

Unit : MM

Recessed Inground Light

Illumination Options


27W	27W	27W	27W
30W	30W	30W	30W



cct	2700K
k	3000K






<input type="checkbox"/> a	60°x1	60°x2	60°x4
<input type="checkbox"/> a	60°x1	60°x2	60°x4

40W	40W	40W	40W
RGB	RGB	RGB	RGB
N	W	1	2



cct	4000K
k	RGB

<input type="checkbox"/> a	60°x1	60°x2	60°x4
<input type="checkbox"/> a	60°x1	60°x2	60°x4



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details

Housing	SS 316 / Aluminum die casting	LOR	~85%
Mounting	Recessed floor mounted	Operating voltage	24V/230V
Light Source	High Power LED	CRI (Ra)	>80
Weight	1820gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~100lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

Power Options


<input type="checkbox"/> N	Non Dimmable
<input type="checkbox"/> P	Phase Cut Dimming
<input type="checkbox"/> A	0-10/ 1-10V Analog
<input type="checkbox"/> D	DALI Dimming

Ingress protection 67 Connectors



Other Products in this Series

026 - 1W	038 / 1238 1W-3W	030 / 1250 1W-3W	0108 3W-9W	0160 6W/12W	0160 9W/18W	0160 12W/24W



Remote & Inbuilt Driver Options
Ordering code : ERIxxx(model no)-Fx(finish)-xx(cable length)xx(opening)-xxx(voltage)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)-xc(ip connectors)
Example : {605} {FS} {C1} {1W} {24V} {67} {327S} {A} {TC}