





Marcopia 1
ESU623

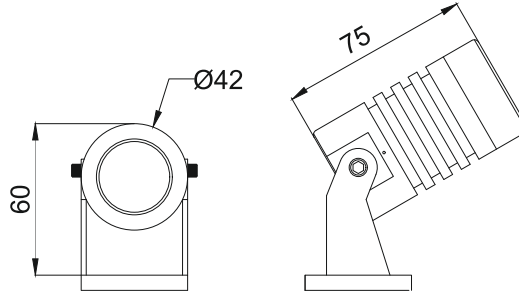

Spike Mounted Base Mounted

- Housing Finish HG Grey HB Black HC Custom
- Voltage 24V DC24V 230V AC230V
- IP Rating 65 IP65

Unit : MM

Surface Uplighter

Illumination Options



1W/2W/3W



85lm/170lm/255lm



2700K



10° 15°
24° 38°



1W/2W/3W











90lm/180lm/270lm



3000K



10° 15°
24° 38°



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details



Housing Aluminum body
Mounting Base / Spike mounted
Light Source High Power LED
Weight 340gms
Junction Temperature Tj<75°C
Heat Sink AI6063

LOR ~80%
Operating voltage 24V/230V
CRI (Ra) >80
MacAdam Ellipse <3
Luminous Efficacy ~75lm/W
Life Time L80-B10 50,000hrs.

Accessories

Power Options

- N Non Dimmable
 P Phase Cut Dimming
 A 0-10/ 1-10V Analog
 D DALI Dimming



Other Products in this Series



Ordering code : ESUxxx(model no)-Hx(housing)-xxx(voltage)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)-xx(mounting)-xx(cowl)
Example : {623} {HG} {24V} {65} {327S} {A} {BM} {CL}