





Marcopia 3
ESU625

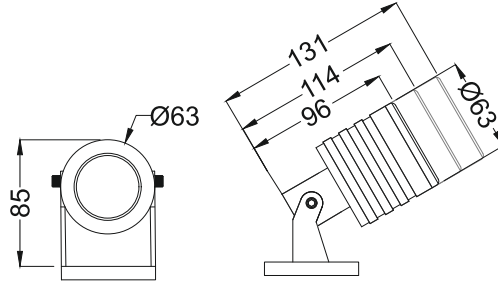

Spike Mounted Base Mounted

- Housing Finish: HG Grey, HB Black, HC Custom
- Voltage: 24V DC24V, 230V AC230V
- IP Rating: 65 IP65

Unit : MM

Surface Uplighter

Illumination Options



6W/10W/14W



540lm/900lm/1260lm



2700K



15° 24°
36° 60°



6W/10W/14W











565lm/940lm/1315lm



3000K



15° 24°
36° 60°



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details


Housing: Aluminum body
 Mounting: Base / Spike mounted
 Light Source: High Power LED
 Weight: 530gms
 Junction Temperature: Tj<75°C
 Heat Sink: Al6063

LOR: ~80%
 Operating voltage: 24V/230V
 CRI (Ra): >80
 MacAdam Ellipse: <3
 Luminous Efficacy: ~75lm/W
 Life Time: L80-B10 50,000hrs.


Accessories

Power Options

- N Non Dimmable
- P Phase Cut Dimming
- A 0-10/ 1-10V Analog
- D DALI Dimming



Driver Options

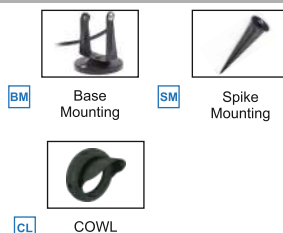

CL COWL

Other Products in this Series



Marcopia 1 ESU623 042 - 1W-3W Marcopia 2 ESU624 047 - 6W Marcopia 4 ESU626 088 - 3W/6W Marcopia 5 ESU627 0130 - 6W/12W Marcopia 6 ESU628 0158 - 12W-24W

Ordering code : ESUxxx(model no)-Hx(housing)-xxx(voltage)-xx(IP)-xxxxx(watt+cct+beam angle)-x(dimming)-xx(mounting)-xx(cowl)
 Example : {625} {HG} {24V} {65} {1427S} {A} {BM} {CL}