





Marcopia 5
ESU627

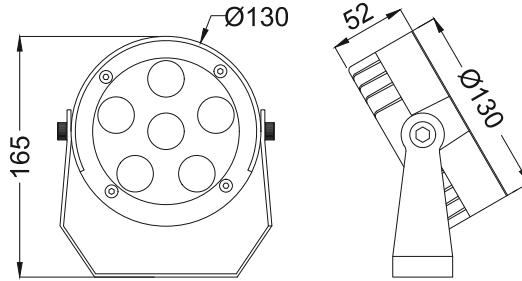

Spike Mounted Base Mounted

Housing Finish	<input type="checkbox"/> HG Grey <input type="checkbox"/> HB Black <input type="checkbox"/> HC Custom
Voltage	<input type="checkbox"/> 24V DC24V <input type="checkbox"/> 230V AC230V
IP Rating	<input type="checkbox"/> 65 IP65

Unit : MM

Surface Uplighter









Illumination Options

<input type="checkbox"/> 27W/27M <input type="checkbox"/> 27S/27M		6W/12W
<input type="checkbox"/> 30W/30V <input type="checkbox"/> 30S/30M		6W/12W

	520lm/1045lm
	545lm/1090lm

	2700K
	3000K

	8° 15° 30° 45°
	8° 15° 30° 45°



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *



Technical Details

Housing	Aluminum body	LOR	~80%
Mounting	Base / Spike mounted	Operating voltage	24V/230V
Light Source	High Power LED	CRI (Ra)	>80
Weight	670gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

Power Options

<input type="checkbox"/> N	Non Dimmable
<input type="checkbox"/> P	Phase Cut Dimming
<input type="checkbox"/> A	0-10/ 1-10V Analog
<input type="checkbox"/> D	DALI Dimming



Driver Options

Other Products in this Series



Marcopia 1 ESU623 Ø42 - 1W-3W	Marcopia 2 ESU624 Ø47 - 6W	Marcopia 3 ESU625 Ø63 - 6W-14W	Marcopia 4 ESU626 Ø88 - 3W/6W	Marcopia 6 ESU628 Ø158 - 12W-24W
-------------------------------------	----------------------------------	--------------------------------------	-------------------------------------	--

Ordering code : ESUxxx(model no)-Hx(housing)-xxx(voltage)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)-xx(mounting)-xx(cowl)
 Example : {627} {HG} {24V} {65} {1227S} {A} {BM} {CL}