


**Peculo Baton - S**  
EPL711

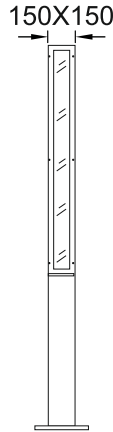

**Finish Options**

- Housing  HG Grey  
 HB Black  
 HC Custom

- IP Rating  65 IP65

Unit : MM

**Pole Light**

**Illumination Options**



20W



1740lm



2700K

**Pole height**



3.0m



20W








1820lm



3000K



3.0m

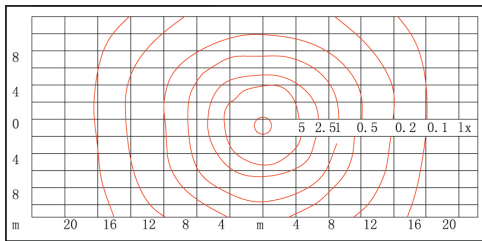


\* All degree & wattage options with photometric data available on request \*  
 \* IP variants & list of accessories for this model available on request \*

**Technical Details**

Housing	Aluminum die casting	LOR	~80%
Mounting	Pole mounted	UGR	<19
Light Source	SMD	CRI (Ra)	>80
Pole height	3.0m	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

**Accessories**      **Other Products in this Series**

- Power Options**
- N Non Dimmable
  - P Phase Cut Dimming
  - A 0-10/ 1-10V Analog
  - D DALI Dimming

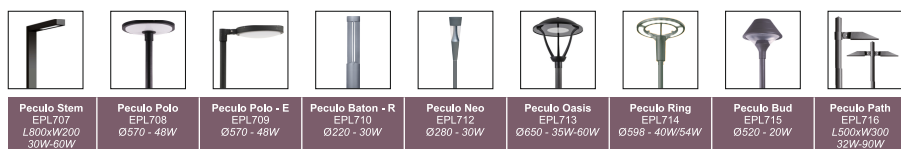

Ordering code : EPLxxx(model no)-Hx(housing)-xx(IP)-xxxxxxx(watt+cct+pole height)-x(dimming)  
 Example : {711} {HG} {65} {20273.0} {A}