




Peculo Bud
EPL715

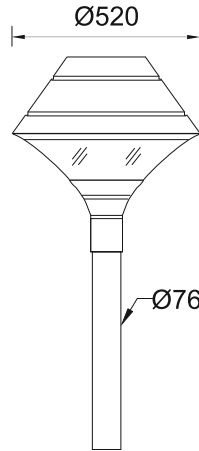

Finish Options

Housing HG Grey
 HB Black
 HC Custom

IP Rating 65 IP65

Unit : MM

Pole Light

Illumination Options



20W



1940lm



2700K

Pole height



3.0m



20W








2010lm



3000K



3.0m



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details

Housing	Aluminum die casting	LOR	~80%
Mounting	Pole mounted	UGR	<19
Light Source	COB	CRI (Ra)	>80
Pole height	3.0m	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

Power Options

- N Non Dimmable
- P Phase Cut Dimming
- A 0-10/ 1-10V Analog
- D DALI Dimming

Other Products in this Series

Peculo Stem EPL707 L800xW200 30W-60W	Peculo Polo EPL708 Ø570 - 48W	Peculo Polo - E EPL709 Ø570 - 48W	Peculo Baton - R EPL710 Ø220 - 30W	Peculo Baton - S EPL711 L150xW150 20W	Peculo Neo EPL712 Ø280 - 30W	Peculo Oasis EPL713 Ø650 - 35W/60W	Peculo Ring EPL714 Ø598 - 40W/54W	Peculo Path EPL716 L500xW300 32W-90W

Ordering code : EPL,xxx(model no)-Hx(housing)-xx(IP)-xxxxxx(watt+cct+pole height)-x(dimming)
Example : (715) (HG) (65) (20273.0) (A)