




**Peculo Oasis**  
EPL713

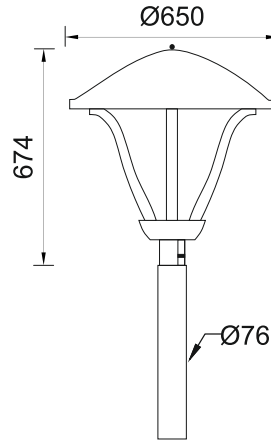

**Finish Options**

- Housing  HG Grey  
 HB Black  
 HC Custom

- IP Rating  65 IP65

Unit : MM

**Pole Light**

**Illumination Options**



35W/50W/60W



4020lm/5750lm/6870lm



2700K



35W/50W/60W



4180lm/5950lm/7160lm



3000K





**Pole height**



3.0m



3.0m



\* All degree & wattage options with photometric data available on request \*  
 \* IP variants & list of accessories for this model available on request \*

**Technical Details**

Housing	Aluminum die casting	LOR	~80%
Mounting	Pole mounted	UGR	<19
Light Source	High Power LED	CRI (Ra)	>80
Pole height	3.0m	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

**Accessories**

**Power Options**

- N Non Dimmable  
 P Phase Cut Dimming  
 A 0-10/ 1-10V Analog  
 D DALI Dimming

**Other Products in this Series**

Peculo Stem EPL707 L800xW200 30W-60W	Peculo Polo EPL708 Ø570 - 48W	Peculo Polo - E EPL709 Ø570 - 48W	Peculo Baton - R EPL710 Ø220 - 30W	Peculo Baton - S EPL711 L150xW150 20W	Peculo Neo EPL712 Ø280 - 30W	Peculo Ring EPL714 Ø598 - 40W/54W	Peculo Bud EPL715 Ø520 - 20W	Peculo Path EPL716 L500xW300 32W-90W

Ordering code : EPLxxx(model no)-Hx(housing)-xx(IP)-xxxxxx(watt+cct+pole height)-x(dimming)  
 Example : (713) (HG) (65) (60273.0) (A)