




**Peculo Stem
EPL707**

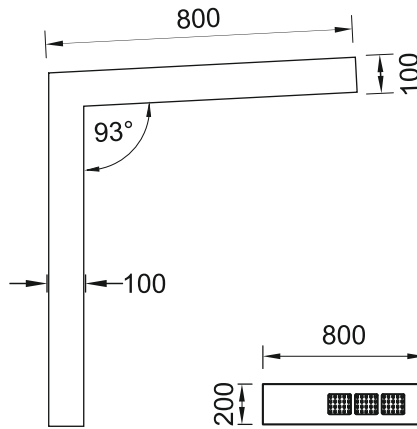

Finish Options

- Housing HG Grey
 HB Black
 HC Custom

- IP Rating 65 IP65

Unit : MM

Pole Light

Illumination Options

27	27
3.0	4.0
27	6.0



30W/40W/60W



3450lm/4600lm/6900lm



2700K

30	30
3.0	4.0
30	6.0



30W/40W/60W



3600lm/4800lm/7200lm



3000K





Pole height



3.0m 4.0m
6.0m



3.0m 4.0m
6.0m



* All degree & wattage options with photometric data available on request *
 * IP variants & list of accessories for this model available on request *


Technical Details

Housing	Aluminum die casting	LOR	~80%
Mounting	Pole mounted	UGR	<19
Light Source	High Power LED	CRI (Ra)	>80
Pole height	3.0m/4.0m/6.0m	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

- Power Options**
- N Non Dimmable
 - P Phase Cut Dimming
 - A 0-10/ 1-10V Analog
 - D DALI Dimming

Other Products in this Series

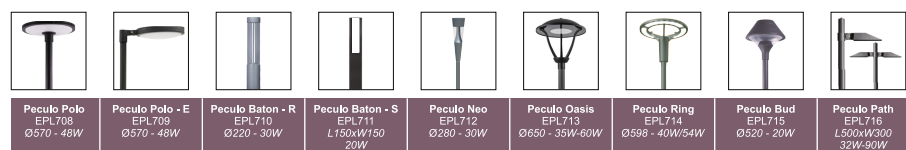

Ordering code : EPLxxx(model no)-Hx(housing)-xx(IP)-xxxxxxx(watt+cct+pole height)-x(dimming)
 Example : (707) {HG} {65} {60273.0} {A}