





**Ques R2**  
IRD750

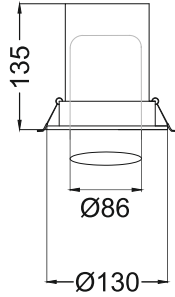

Tilt & Rotate

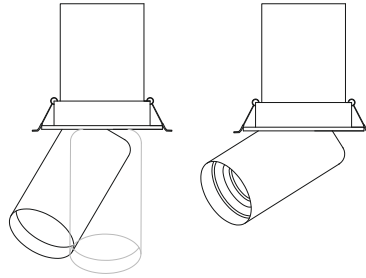

**Finish Options**

Trim  TW White  
 TB Black  
 TC Custom

Baffle  BW White  
 BB Black  
 BC Custom

IP Rating  20 IP20  
 44 IP44

Unit : MM

**Recessed Adjustable Downlight**

**Illumination Options**



25W



2125lm



2700K



15° 24°  
38° 60°



25W











2250lm



3000K



15° 24°  
38° 60°



\* All degree & wattage options with photometric data available on request \*  
 \* IP variants & list of accessories for this model available on request \*

**Technical Details**

Housing Aluminum die casting  
 Mounting Spring - Ceiling mounted  
 Light Source Single source LED COB  
 Weight 1200gms  
 Junction Temperature Tj<75°C  
 Heat Sink Al6063

LOR ~80%  
 UGR <19  
 CRI (Ra) >80  
 MacAdam Ellipse <3  
 Luminous Efficacy ~75lm/W  
 Life Time L80-B10 50,000hrs.

**Accessories**

**Power Options**

N Non Dimmable  
 P Phase Cut Dimming  
 A 0-10/ 1-10V Analog  
 D DALI Dimming



Honeycomb

**Other Products in this Series**



Ordering code : IRDxxx(model no)-Tx(trim)-Bx(baffle)-xx(IP)-xxxxx(watt+cct+beam angle)-x(dimming)-x(filter)  
 Example : {750} {TW} {BW} {20} {2527S} {A} {H}