





Quest S1
IRD751



Tilt & Rotate

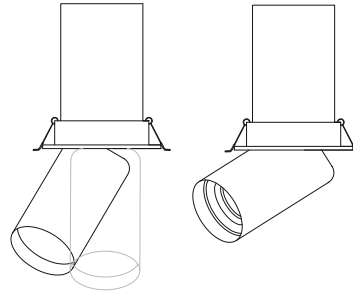

Finish Options

Trim TW White
 TB Black
 TC Custom

Baffle BW White
 BB Black
 BC Custom

IP Rating 20 IP20
 44 IP44

Unit : MM

Recessed Adjustable Downlight

Illumination Options



12W/15W



1020lm/1275lm



2700K



15° 24°
38° 60°



12W/15W











1080lm/1350lm



3000K



15° 24°
38° 60°



* All degree & wattage options with photometric data available on request *
 * IP variants & list of accessories for this model available on request *

Technical Details

Housing Aluminum die casting
 Mounting Spring - Ceiling mounted
 Light Source Single source LED COB
 Weight 720gms
 Junction Temperature Tj<75°C
 Heat Sink Al6063

LOR ~80%
 UGR <19
 CRI (Ra) >80
 MacAdam Ellipse <3
 Luminous Efficacy ~75lm/W
 Life Time L80-B10 50,000hrs.

Accessories

Power Options

N Non Dimmable
 P Phase Cut Dimming
 A 0-10/ 1-10V Analog
 D DALI Dimming



H Honeycomb

Other Products in this Series



Ordering code : IRDxxx(model no)-Tx(trim)-Bx(baffle)-xx(IP)-xxxxx(watt+cct+beam angle)-x(dimming)-x(filter)
 Example : {751} {TW} {BW} {20} {1527S} {A} {H}