




**Regale 1**  
IRD783

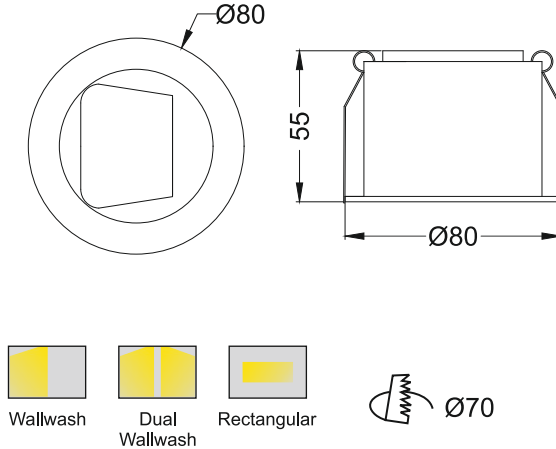

**Finish Options**






- Trim TW White  
TB Black  
TC Custom
- Reflector RW Wallwash  
RD Dual Wallwash  
RR Rectangular
- IP Rating 44 IP44

Unit : MM

**Recessed Fixed Wallwash Downlight**

**Illumination Options**

- |   |  |     |  |       |  |       |  |            |
|---|--|-----|--|-------|--|-------|--|------------|
| <span style="border: 1px solid black; padding: 2px;">27A</span> |  | 15W |  | 975lm |  | 2700K |  | Asymmetric |
| <span style="border: 1px solid black; padding: 2px;">30A</span> |  | 15W |  | 1050m |  | 3000K |  | Asymmetric |



\* All degree & wattage options with photometric data available on request \*  
 \* IP variants & list of accessories for this model available on request \*

**Technical Details**

Housing	Aluminum die casting	LOR	~80%
Mounting	Spring - Ceiling mounted	UGR	<19
Light Source	Single source COB LED	CRI (Ra)	>80
Weight	210gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

**Accessories**

- Power Options**
- N Non Dimmable
  - P Phase Cut Dimming
  - A 0-10/ 1-10V Analog
  - D DALI Dimming

**Other Products in this Series**



Ordering code : IRDxxx(model no)-Tx(trim)-Rx(reflector)-xx(IP)-xxxxx(watt+ctt+beam angle)-(dimming)  
 Example : {783} {TW} {RW} {44} {1527A} {A}