


- Finish FS SS
- Cable Length C0.5 0.5 Meter
C1 1 Meter
CC Custom
- Voltage 24V DC24V
- IP Rating 68 IP68

**Shuays R-3
ERU544**




Unit : MM

Recessed Underwater Light

Illumination Options

<table border="1"> <tr><td>30M</td><td>30N</td><td>30S</td><td>30M</td><td>30W</td><td>30</td></tr> <tr><td>40M</td><td>40N</td><td>40S</td><td>40M</td><td>40W</td><td>40</td></tr> </table> <table border="1"> <tr><td>65N</td><td>65M</td><td>65S</td><td>65M</td><td>65W</td><td>65</td></tr> <tr><td>RGB</td><td>RGB</td><td>RGB</td><td>RGB</td><td>RGB</td><td>Asy</td></tr> <tr><td>N</td><td>N</td><td>S</td><td>M</td><td>W</td><td>Asy</td></tr> </table>	30M	30N	30S	30M	30W	30	40M	40N	40S	40M	40W	40	65N	65M	65S	65M	65W	65	RGB	RGB	RGB	RGB	RGB	Asy	N	N	S	M	W	Asy	3W/6W/9W	315lm/630lm/945lm 330lm/660lm/990lm	<table border="1"> <tr><td>CCT</td><td>3000K</td></tr> <tr><td>K</td><td>4000K</td></tr> </table>	CCT	3000K	K	4000K	8° 15° 30° 45° 60° Asy 8° 15° 30° 45° 60° Asy
30M	30N	30S	30M	30W	30																																	
40M	40N	40S	40M	40W	40																																	
65N	65M	65S	65M	65W	65																																	
RGB	RGB	RGB	RGB	RGB	Asy																																	
N	N	S	M	W	Asy																																	
CCT	3000K																																					
K	4000K																																					
<table border="1"> <tr><td>65N</td><td>65M</td><td>65S</td><td>65M</td><td>65W</td><td>65</td></tr> <tr><td>RGB</td><td>RGB</td><td>RGB</td><td>RGB</td><td>RGB</td><td>Asy</td></tr> <tr><td>N</td><td>N</td><td>S</td><td>M</td><td>W</td><td>Asy</td></tr> </table>	65N	65M	65S	65M	65W	65	RGB	RGB	RGB	RGB	RGB	Asy	N	N	S	M	W	Asy	3W/6W/9W	375lm/750lm/1125lm 180lm/360lm/540lm	<table border="1"> <tr><td>CCT</td><td>6500K</td></tr> <tr><td>K</td><td>RGB</td></tr> </table>	CCT	6500K	K	RGB	8° 15° 30° 45° 60° Asy 8° 15° 30° 45° 60° Asy												
65N	65M	65S	65M	65W	65																																	
RGB	RGB	RGB	RGB	RGB	Asy																																	
N	N	S	M	W	Asy																																	
CCT	6500K																																					
K	RGB																																					

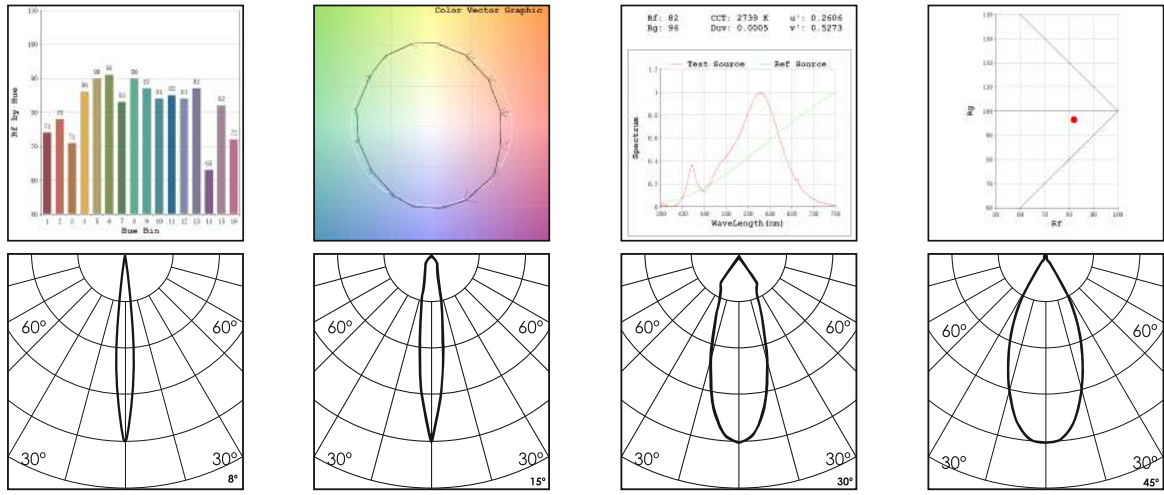

* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details

Housing	SS 316 (316L available on request)	LOR	~85%
Mounting	Recessed mounted	CRI (Ra)	>80
Light Source	High Power LED	MacAdam Ellipse	<3
Weight	540gms	Luminous Efficacy	~100lm/W
Junction Temperature	Tj>75°C (To be used only submerged underwater)	Life Time	L80-B10 50,000hrs.

Accessories **Other Products in this Series**

Power Options	Ingress protection 68 Connectors														
<table border="1"> <tr><td>N</td><td>Non Dimmable</td></tr> <tr><td>P</td><td>Phase Cut Dimming</td></tr> <tr><td>A</td><td>0-10/ 1-10V Analog</td></tr> <tr><td>D</td><td>DALI Dimming</td></tr> </table>	N	Non Dimmable	P	Phase Cut Dimming	A	0-10/ 1-10V Analog	D	DALI Dimming	<table border="0"> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>IC 'I' Connector</td> <td>TC 'T' Connector</td> <td>XC 'X' Connector</td> </tr> </table>				IC 'I' Connector	TC 'T' Connector	XC 'X' Connector
N	Non Dimmable														
P	Phase Cut Dimming														
A	0-10/ 1-10V Analog														
D	DALI Dimming														
IC 'I' Connector	TC 'T' Connector	XC 'X' Connector													

--	--	--	--	--	--	--

Ordering code : ERUxxx(model no)-Fx(finish)-xx(cable length)-xxx(voltage)-xx(IP)-xxxx(watt+cct+beam angle)-(dimming)-xc(ip connectors)
 Example : {544} {FS} {C1} {24V} {68} {930S} {A} {TC}