

**Finish Options**

- Trim  TW White  
 TB Black  
 TC Custom

IP Rating  44 IP44

**Speck Midi  
IRD404**



Unit : MM

**Recessed Adjustable Downlight**

**Illumination Options**

27N	27S
27M	



7W



520lm



2700K



15° 24°  
38°

30N	30S
30M	



7W










560lm



3000K



15° 24°  
38°



\* All degree & wattage options with photometric data available on request \*  
 \* IP variants & list of accessories for this model available on request \*

**Technical Details**


Housing	Aluminum die casting	LOR	~80%
Mounting	Spring - Ceiling mounted	UGR	<19
Light Source	Single source LED	CRI (Ra)	>80
Weight	132gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

**Accessories**

**Power Options**

- N Non Dimmable  
 P Phase Cut Dimming  
 A 0-10/ 1-10V Analog  
 D DALI Dimming

**Other Products in this Series**

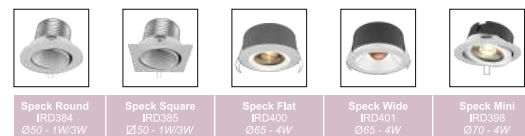

Ordering code : IRDxxx(model no)-Tx(trim)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)  
 Example : {404} {TW} {44} {727S} {A}