




Svelte

Svelte 6
LFS455

30 LED's per meter

660 lumens per meter@3000k

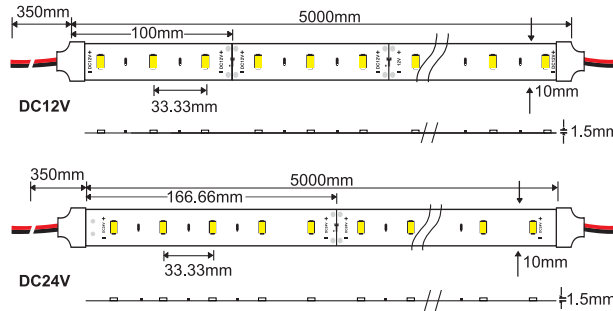

Voltage 12V DC12V
24V DC24V

Sleeving SC Clear
SO Opal

IP Rating 20 IP20
65 IP65
67 IP67
68 IP68

Standard LED strip

Linear LED Strip Light

Custom made color temperature can be made available on request



6W/M



585lm/m
610lm/m



2200K
2400K



690lm/m
720lm/m



4000K
5000K



120°



635lm/m
660lm/m












2700K
3000K



775lm/m
805lm/m



6500K
7000K



Technical Details

LFS455 model can also be used without any heat sink profile


Type	Flexible circuit board	Number of LED's per meter	30 LED's
Mounting	Surface tape mounted	CRI	>90
Light Source	SMD LED	MacAdam Ellipse	<3
Minimum cut length	100mm/166.66mm	Luminous Efficacy	110lm/W@3000k
Junction Temperature	Tj<75 Degree	Lumens per meter	660lm/M@3000k
Operating Voltage	12V/24V	Life Time	L80-B10 50,000hrs.

Accessories

Profile that can be used with above LED Strip

Power Options

- N Non Dimmable
- P Phase Cut Dimming
- A 0-10/ 1-10V Analog
- D DALI Dimming

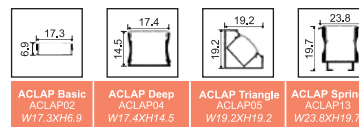

Ordering code : LFSxxx(model no)-xxx(voltage)-Sx(sleeving)-xx(IP)-xxxx(watt per mtr+cct)-x(dimming)-ACCONxx(connector)-ACLAPxx(profile)
 Example : {455} {12V} {SC} {65} {2,427} {A} {02} {02}