





**Svelte+ Tuneable
LFS475**

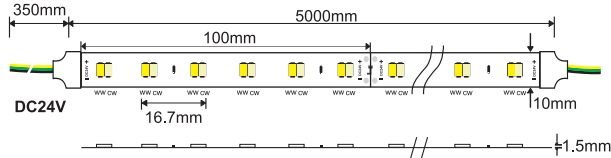

WW + CW Dual LED



















Voltage 24V DC24V

Sleeving SC Clear
SO Opal

IP Rating 20 IP20
65 IP65
67 IP67
68 IP68

Linear LED Strip Light

 19.2W/M	23  1100lm/m	 2300K	30  1200lm/m	 3000K
 120°	27  1150lm/m	 2700K	60  1350lm/m	 6000K

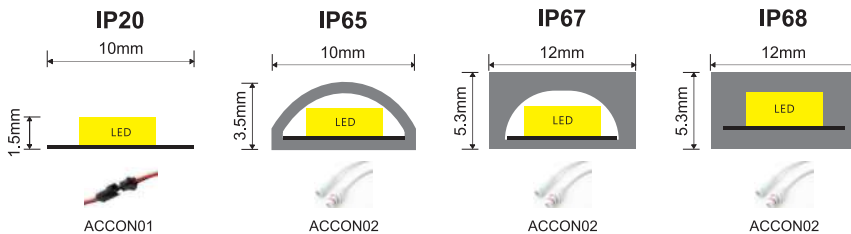

Technical Details

****LFS475 model cannot be used without any heat sink profile****


Type	Flexible circuit board	Number of LED's per meter	60 LED's
Mounting	Surface tape mounted	CRI	>80
Light Source	SMD LED	MacAdam Ellipse	<3
Minimum cut length	100mm	Luminous Efficacy	63lm/W@3000k
Junction Temperature	Tj<75 Degree	Lumens per meter	1200lm/M@3000k
Operating Voltage	24V	Life Time	L80-B10 50,000hrs.

Accessories

Profile that can be used with above LED Strip

Control Options

- A 0-10/ 1-10V Analog
- D DALI Dimming

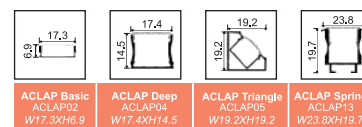

Ordering code : LFSxxx(model no)-xxx(voltage)-Sx(sleeving)-xx(IP)-xxxxx(watt per mtr+cct)-x(dimming)-ACCONxx(connector)-ACLAPxx(profile)
 Example : {475} {24V} {SC} {65} {19.227} {A} {02} {02}