




Tomoko Multi
EBL728

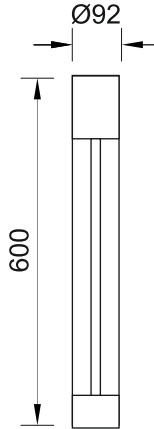

Finish Options

Housing HG Grey
 HB Black
 HC Custom

IP Rating 65 IP65

Unit : MM

Bollard Light

Illumination Options



8W



750lm



2700K

Bollard height



600mm



8W







810lm



3000K



600mm



* All degree & wattage options with photometric data available on request *
 * IP variants & list of accessories for this model available on request *

Technical Details

Housing	Aluminum die casting	LOR	~80%
Mounting	Bollard mounted	UGR	<19
Light Source	COB	CRI (Ra)	>80
Pole height	600mm	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

Power Options

- N Non Dimmable
- P Phase Cut Dimming
- A 0-10/ 1-10V Analog
- D DALI Dimming

Other Products in this Series



Ordering code : EBLxxx(model no)-Hx(housing)-xx(IP)-xxxxxx(watt+cct+bollard height)-x(dimming)
 Example : {728} {HG} {65} {827600} {A}