



**Trax Two Gyp4  
LPL530**

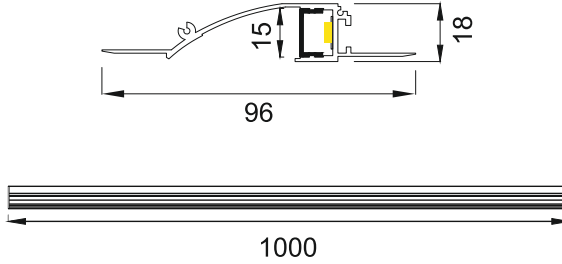

**Finish Options**

- Housing Finish**
- HA Al. Anodised
  - HW White
  - HB Black
  - HC Custom






- Length**
- L10 1000 MM
  - L20 2000 MM
  - LC Custom

- IP Rating**
- 20 IP20

Unit : MM

**Linear LED Light - To be used with Svelte Series flexible strip**

 <b>LFS455/456/457</b> 6W/12W/24W/M <input type="checkbox"/> 6W <input type="checkbox"/> 12W <input type="checkbox"/> 24W	<input type="checkbox"/> 27  450/900/1800lm/m	 2700K	<input type="checkbox"/> 40  510/1020/2040lm/m	 4000K
 <b>Diffused</b>	<input type="checkbox"/> 30  480/960/1920lm/m	 3000K	<input type="checkbox"/> 65  600/1200/2400lm/m	 6500K



**Technical Details**

Housing material	Aluminum Extruded	Number of LED's per meter	30/60/120LED's
Diffuser material	PMMA	CRI	>90
Mounting	Recessed mounted	MacAdam Ellipse	<3
Weight	850gms per 1000mm	Luminous Efficacy	110lm/W@3000k
Junction Temperature	Tj<75 Degree	Lumens per meter	660/1320/2640lm/M@3000k
		Life Time	L80-B10 50,000hrs.

**Accessories** **Other Products in this Series**

- Power Options**
- N Non Dimmable
  - P Phase Cut Dimming
  - A 0-10/ 1-10V Analog
  - D DALI Dimming

 62 26	 52 12	 96	 119	 133
Trax Two Gyp1 LPL511 W26xH14	Trax Two Gyp2 LPL513 W12xH14	Trax Two Gyp4 LPL530 W96xH18	Trax Two Gyp5 LPL531 W119xH18	Trax Two Gyp6 LPL532 W133xH18

Ordering code : LPLxxx(model no)-Hx(housing)-Lxx(length)-xx(IP)-xxxx(watt per meter+cct)-(A)(dimming)  
 Example : {530} {HA} {L20} {20} {1227} {A}