




**Willow Wall R**  
**ESW700**

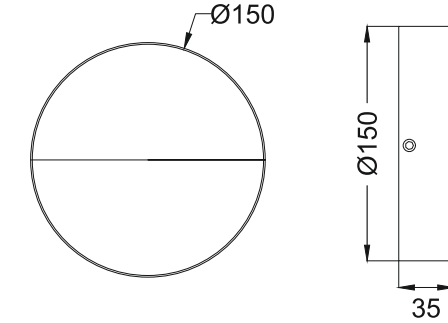

Wall Surface

**Finish Options**

- Housing  HG Grey  
 HB Black  
 HC Custom

- IP Rating  65 IP65

Unit : MM

**Surface Wall Light**

**Illumination Options**

- 27  
 27




6W



330lm



2700K



- 30  
 30







6W



360lm



3000K



\* All degree & wattage options with photometric data available on request \*  
 \* IP variants & list of accessories for this model available on request \*

**Technical Details**

Housing	Aluminum die casting	LOR	~75%
Mounting	Wall mounted	UGR	<19
Light Source	SMD	CRI (Ra)	>80
Weight	270gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~70lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

**Accessories**

**Power Options**

- N Non Dimmable  
 P Phase Cut Dimming  
 A 0-10/ 1-10V Analog  
 D DALI Dimming

**Other Products in this Series**



Ordering code : ESWxxx(model no)-Hx(housing)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)  
 Example : {700} {HG} {65} {627S} {A}