




Willow Wall S
ESW701

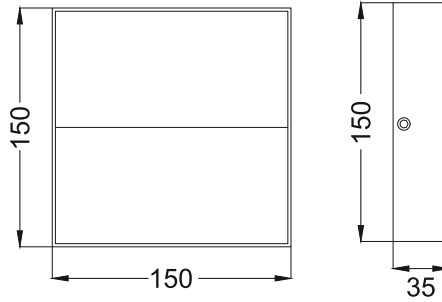

Wall Surface

Finish Options

- Housing HG Grey
 HB Black
 HC Custom

- IP Rating 65 IP65

Unit : MM

Surface Wall Light

Illumination Options

- 27
 27




6W



330lm



2700K



- 30
 30







6W



360lm



3000K



* All degree & wattage options with photometric data available on request *
 * IP variants & list of accessories for this model available on request *

Technical Details

Housing	Aluminum die casting	LOR	~75%
Mounting	Wall mounted	UGR	<19
Light Source	SMD	CRI (Ra)	>80
Weight	480gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~70lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

Power Options

- N Non Dimmable
 P Phase Cut Dimming
 A 0-10/ 1-10V Analog
 D DALI Dimming

Other Products in this Series



Willow Plane ERW622 L105xW60 - 5W	Willow Down ERW696 L171xW106 8W	Willow UP ERW697 L106xW171 8W	Willow Square ERW699 L160xW160 8W	Willow Wall R ESW700 Ø150 - 6W
---	--	--	--	--------------------------------------

Ordering code : ESWxxx(model no)-Hx(housing)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)
 Example : {701} {HG} {65} {627S} {A}