




**X'uber Round
IRD761**

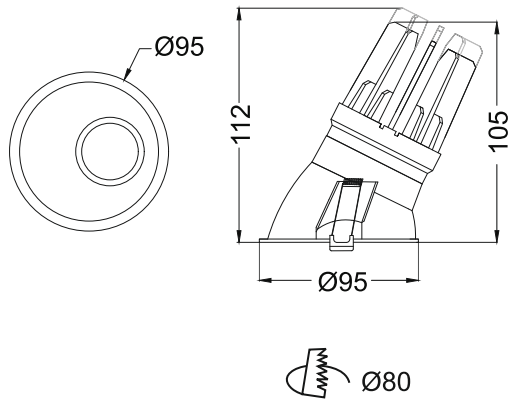

Finish Options






- Trim**
- TW White
 - TB Black
 - TC Custom
- Baffle**
- BW White
 - BB Black
 - BC Custom
- IP Rating**
- 20 IP20
 - 44 IP44

Unit : MM

Recessed Fixed Wallwash Downlight

Illumination Options

- | | | | | | | | | |
|------------------------------|--|---------|--|--------------|--|-------|--|------------|
| <input type="checkbox"/> 27A | | 10W/15W | | 750lm/1125lm | | 2700K | | Asymmetric |
| <input type="checkbox"/> 30A | | 10W/15W | | 800lm/1200lm | | 3000K | | Asymmetric |



* All degree & wattage options with photometric data available on request *
 * IP variants & list of accessories for this model available on request *

Technical Details

Housing	Aluminum die casting	LOR	~80%
Mounting	Spring - Ceiling mounted	UGR	<19
Light Source	Single source LED	CRI (Ra)	>80
Weight	300/350gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories

- Power Options**
- N Non Dimmable
 - P Phase Cut Dimming
 - A 0-10/ 1-10V Analog
 - D DALI Dimming

Other Products in this Series



Ordering code : IRDxxx(model no)-Tx(trim)-Bx(baffle)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)
 Example : {761} {TW} {BW} {20} {727S} {A}