



Yin Yang 3
ESU649

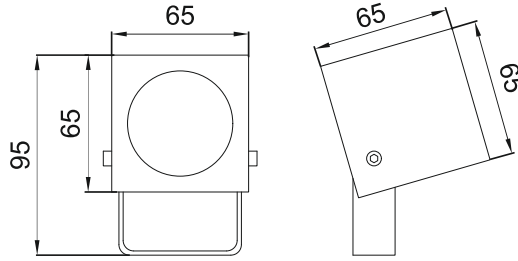

Spike Mounted Base Mounted

Housing Finish	<input type="checkbox"/> HG Grey <input type="checkbox"/> HB Black <input type="checkbox"/> HC Custom
Voltage	<input type="checkbox"/> 24V DC24V <input type="checkbox"/> 230V AC230V
IP Rating	<input type="checkbox"/> 65 IP65

Unit : MM

Surface Uplighter









Illumination Options

<input type="checkbox"/> 27W 27W <input type="checkbox"/> 27S 27M	8W
<input type="checkbox"/> 30W 30W <input type="checkbox"/> 30S 30M	8W

1m	680lm
1m	710lm

CCT	2700K
CCT	3000K

a	10° 15° 24° 38°
a	10° 15° 24° 38°



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *


Technical Details

Housing	Aluminum body	LOR	~80%
Mounting	Base / Spike mounted	Operating voltage	24V/230V
Light Source	High Power LED	CRI (Ra)	>80
Weight	610gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	AI6063	Life Time	L80-B10 50,000hrs.

Accessories

Power Options

<input type="checkbox"/> N	Non Dimmable
<input type="checkbox"/> P	Phase Cut Dimming
<input type="checkbox"/> A	0-10/ 1-10V Analog
<input type="checkbox"/> D	DALI Dimming



Other Products in this Series

Yin Yang 1 ESU647 □35 - 1W/3W	Yin Yang 2 ESU648 □45 - 3W/5W	Yin Yang 4 ESU650 □96 - 9W/18W	Yin Yang 5 ESU651 □130 - 18W/27W	Yin Yang 6 ESU652 □170 - 32W/48W

Ordering code : ESUxxx(model no)-Hx(housing)-xxx(voltage)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)-xx(mounting)-xx(cowl)
Example : {649} {HG} {24V} {65} {827S} {A} {BM} {CL}