





**Yin Yang 4**  
**ESU650**

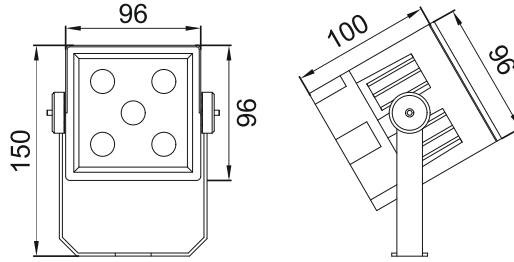

Spike Mounted Base Mounted

Housing Finish	<input type="checkbox"/> HG Grey <input type="checkbox"/> HB Black <input type="checkbox"/> HC Custom
Voltage	<input type="checkbox"/> 24V DC24V <input type="checkbox"/> 230V AC230V
IP Rating	<input type="checkbox"/> 65 IP65

Unit : MM

**Surface Uplighter**









**Illumination Options**

<input type="checkbox"/> 27W (27W) <input type="checkbox"/> 27S (27M)	9W/18W
<input type="checkbox"/> 30W (30W) <input type="checkbox"/> 30S (30M)	9W/18W

785lm/1570lm	820lm/1640lm
--------------	--------------

2700K	3000K
-------	-------

10° 15° 24° 38°	10° 15° 24° 38°
--------------------	--------------------



\* All degree & wattage options with photometric data available on request \*  
\* IP variants & list of accessories for this model available on request \*


**Technical Details**

Housing	Aluminum body	LOR	~80%
Mounting	Base / Spike mounted	Operating voltage	24V/230V
Light Source	High Power LED	CRI (Ra)	>80
Weight	1980gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~75lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.


**Accessories**

**Power Options**

<input type="checkbox"/> N	Non Dimmable
<input type="checkbox"/> P	Phase Cut Dimming
<input type="checkbox"/> A	0-10/ 1-10V Analog
<input type="checkbox"/> D	DALI Dimming



**Other Products in this Series**



Ordering code : ESUxxx(model no)-Hx(housing)-xxx(voltage)-xx(IP)-xxxxx(watt+cct+beam angle)-x(dimming)-xx(mounting)-xx(cowl)  
Example : (650) (HG) (24V) (65) (1827S) (A) (BM) (CL)