





Youvas RA-3
ERI609

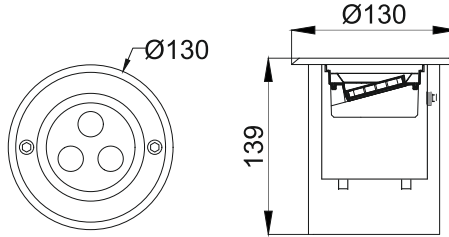

Finish	<input type="checkbox"/> FS SS	<input type="checkbox"/> FC Custom	
Cable Length	<input type="checkbox"/> C0.5 0.5 Meter	<input type="checkbox"/> C1 1 Meter	<input type="checkbox"/> CC Custom
Voltage	<input type="checkbox"/> 24V DC24V	<input type="checkbox"/> 230V AC230V	
IP Rating	<input type="checkbox"/> 67 IP67		

External tilting arrangement with Allen key mechanism











Unit : MM

Recessed Inground Adjustable Light

Illumination Options

<input type="checkbox"/> W 3W/6W/9W	<input type="checkbox"/> Im 210lm/420lm/630lm 225lm/450lm/675lm	<input type="checkbox"/> CCT 2700K 3000K	<input type="checkbox"/> a 8° 15° 30° 45° 60° 8° 15° 30° 45° 60°
<input type="checkbox"/> W 3W/6W/9W	<input type="checkbox"/> Im 247lm/495lm/742lm 120lm/240lm/360lm	<input type="checkbox"/> CCT 4000K RGB	<input type="checkbox"/> a 8° 15° 30° 45° 60° 8° 15° 30° 45° 60°



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details

Housing	SS 316 / Aluminum die casting	LOR	~85%
Mounting	Recessed floor mounted	Operating voltage	24V/230V
Light Source	High Power LED	CRI (Ra)	>80
Weight	1580gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~100lm/W
Heat Sink	Al6063	Life Time	L80-B10 50,000hrs.

Accessories


Power Options

<input type="checkbox"/> N	Non Dimmable
<input type="checkbox"/> P	Phase Cut Dimming
<input type="checkbox"/> A	0-10/ 1-10V Analog
<input type="checkbox"/> D	DALI Dimming

Ingress protection 67 Connectors



Other Products in this Series



Remote & Inbuilt Driver Options

Ordering code : ERIxxx(model no)-Fx(finish)-xx(cable length)-xxx(voltage)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)-xc(ip connectors)
Example : {609} {FS} {C1} {24V} {67} {927S} {A} {TC}