




Youvas RA-9
ERI610

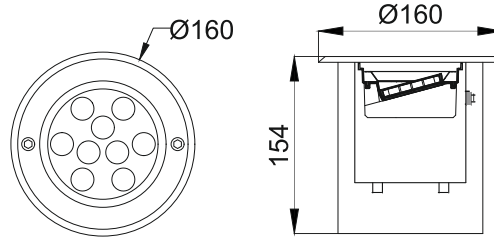

- Finish FS SS
FC Custom
- Cable Length C0.5 0.5 Meter
C1 1 Meter
CC Custom
- Voltage 24V DC24V
230V AC230V
- IP Rating 67 IP67

External tilting arrangement with Allen key mechanism











Unit : MM

Recessed Inground Adjustable Light

Illumination Options

27W 27W 27W 27W	9W/18W	630lm/1260lm 675lm/1350lm	CCT 2700K K	8° 15° 30° 45° 60° 8° 15° 30° 45° 60°
40W 40W 40W 40W	9W/18W	742lm/1485lm 360lm/720lm	CCT 4000K K RGB	8° 15° 30° 45° 60° 8° 15° 30° 45° 60°



* All degree & wattage options with photometric data available on request *
 * IP variants & list of accessories for this model available on request *

Technical Details

Housing	SS 316 / Aluminum die casting	LOR	~85%
Mounting	Recessed floor mounted	Operating voltage	24V/230V
Light Source	High Power LED	CRI (Ra)	>80
Weight	1870gms	MacAdam Ellipse	<3
Junction Temperature	Tj<75°C	Luminous Efficacy	~100lm/W
Heat Sink	AI6063	Life Time	L80-B10 50,000hrs.


Accessories

- Power Options**
- N Non Dimmable
 - P Phase Cut Dimming
 - A 0-10/ 1-10V Analog
 - D DALI Dimming

Ingress protection 67 Connectors



Other Products in this Series



Remote & Inbuilt Driver Options

Ordering code : ERIxxx(model no)-Fx(finish)-xx(cable length)-xxx(voltage)-xx(IP)-xxxxx(watt+cct+beam angle)-x(dimming)-xc(ip connectors)
 Example : {610} {FS} {C1} {24V} {67} {1827S} {A} {TC}