





Zizzi Deep
IRD533

Zizzi Deep Mini
IRD533A

Ø50

Zizzi Deep Max
IRD533B/C

Ø60

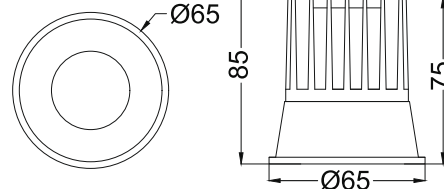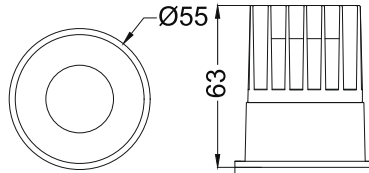

Finish Options

Trim TW White
 TB Black
 TC Custom

Baffle BW White
 BB Black
 BC Custom

IP Rating 20 IP20
 44 IP44

Unit : MM

Recessed Fixed Downlight

Illumination Options



7W & 10W/15W



420lm & 600lm/900lm



2700K



15° 24°
38°



7W & 10W/15W










450lm & 640m/960lm



3000K



15° 24°
38°



* All degree & wattage options with photometric data available on request *
* IP variants & list of accessories for this model available on request *

Technical Details


Housing Aluminum die casting
Mounting Spring - Ceiling mounted
Light Source Single source LED
Weight 170/250/300gms
Junction Temperature Tj<75°C
Heat Sink Al6063

LOR ~80%
UGR <19
CRI (Ra) >80
MacAdam Ellipse <3
Luminous Efficacy ~75lm/W
Life Time L80-B10 50,000hrs.

Accessories

Power Options

N Non Dimmable
 P Phase Cut Dimming
 A 0-10/ 1-10V Analog
 D DALI Dimming



Other Products in this Series



Ordering code : IRDxxx(model no)-Tx(trim)-Bx(baffle)-xx(IP)-xxxx(watt+cct+beam angle)-x(dimming)-x(filter)
Example : {533} {TW} {BW} {20} {727S} {A} {S}